


Folding Pocket Thermometer

Model SPK2



Test Tools HVACR Pros Trust

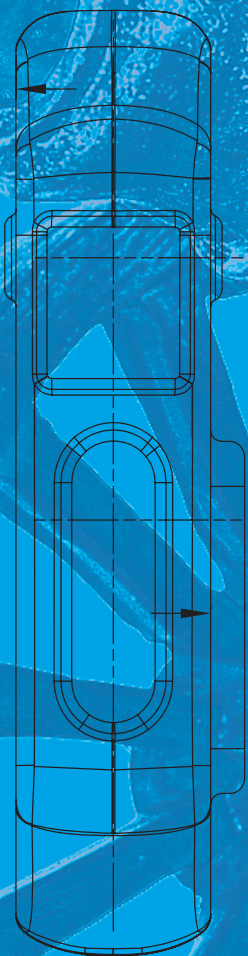

- Hang on air registers or duct walls
- Large display
- Rod folds into body
- T1-T2
- Hold/Max/min
- AA Battery (installed)

**Pierce Soft
Ducts**

7

Pocket Tool

NEW

Folding Pocket Thermometer

Model SPK2



Great for everyday use, the SPK2 fits into your pocket, ready for common temp checks. Set the rod to the angle that fits the job. Poke it through a soft duct or hang it from an edge.

Features

- T1-T2
- Auto power off
- Hold/Max/min
- Low battery indicator
- °F and °C
- Stainless steel probe

Specifications

| | |
|-------------------------|--|
| Operating Environment: | 32°F to 122°F (0°C to 50°C) |
| Measuring Range: | -58°F to 392°F (-50°C to 200°C) |
| Accuracy: | ±1.8°F (-3.8°F to 247.8°F) ±3.6°F (-58°F to -3.8°F, 247°F to 392°F); ±1.0°C (-9.9°C to 119.9°C) ±2.0°C (-50°C to -10°C, 120°C to 200°C) |
| Best Resolution: | 0.1° |
| Over Limit Indication: | Displays OL or -OL |
| Low Battery Indication: | Blinking empty battery icon |
| Battery: | 1 x AA (included) |
| Battery Life: | About 8000 hours |
| Auto Off: | 15 minutes |

Operation

- Press power button for 1 second to turn ON/OFF.
- Press T1-T2 for 1 second to clear values.
- Press Hold/Max/min for 1 second to clear values.
- Hold T1-T2 together with H/M/m to select °F / °C.

Fieldpiece
Designed in USA

Model: SPK2 H27-745



N22675